


呼び圧力2Kフランジ

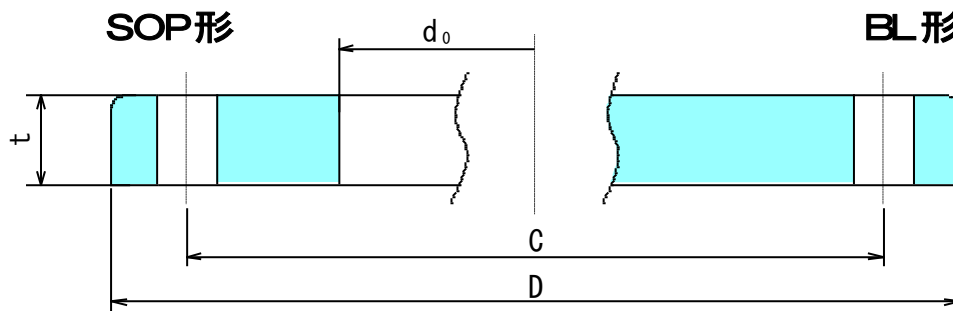

JIS B 2220-2004

呼び径		適用管 の 外径	※内径 d_o	外径 D	厚み t	ボルト穴		
A	B					中心径 C	数	径 h
450	18	457.2	460.0	605	22	555	16	23
500	20	508.0	511.0	655	22	605	20	23
550	22	558.8	562.0	720	24	665	20	25
600	24	609.6	613.0	770	24	715	20	25
650	26	660.4	664.0	825	24	770	24	25
700	28	711.2	715.0	875	24	820	24	25
750	30	762.0	766.0	945	24	880	24	27
800	32	812.8	817.0	995	24	930	24	27
850	34	863.6	868.0	1045	24	980	24	27
900	36	914.4	919.0	1095	24	1030	24	27
1000	40	1016.0	1021.0	1195	26	1130	28	27
1100	44	1117.6	1123.0	1305	26	1240	28	27
1200	48	1219.2	1224.0	1420	26	1350	32	27
1350	54	1371.6	1377.0	1575	26	1505	32	27
1500	60	1524.0	1529.0	1730	28	1660	36	27

※内径寸法は参考値を示す。